

The instruction of DSP3+ software update

Please install ActiveSync software on your PC well before software update. Or please log in <http://smelecom.com/sm/download.htm> and download ActiveSync software and install it on your PC first of all.

| Home | News | Products | Download | Sales | Online-Shopping |
|------------------------------------------------------------------------------------|------------|---------------|--------------------------------------|------------------------|-----------------|
| ▪ Data Specialist Plus 3+ | ▪ USA PROG | ▪ M-CORRECTOR | ▪ Airbag | | |
| ▪ Data Smart 3+ | ▪ VAG PROG | ▪ CAN-BLOCKER | ▪ Immo | | |
| Software | | | | | |
| Datasmart III,VAG PROG and USA PROG (version:2.0.0.9.5 run on windows XP, win7) | | | PC_link setup.exe | | |
| DataSpecialist III ActiveSync (windows XP) | | | ActiveSync(setup.msi) | | |
| DataSpecialist III ActiveSync (windows 7) | | | ActiveSync(32bit win7) | ActiveSync(64bit win7) | |
| Data Smart III User's driver | | | driver32.rar (32bit windows XP,win7) | | |
| | | | driver64.rar (64bit win7) | | |
| A4_Decoder Setup(2009.2.3) | | | A4_Decoder Setup | | |
| TMS programmer Software | | | tms.rar | | |
| 9S12 In_circuit Programmer Setup | | | 9S12 In_circuit Programmer Setup.exe | | |
| NEC programmer Software | | | NECPROG.exe | | |
| Driver(for old USA prog and VAG dash prog) | | | User's driver.rar | | |

The steps are similar among “Function Sync” and “Active Function” and “Software Update”, take “Software update” as an example:

- 1、 Connect test connector and power supply well, shown as figure 1:



Figure 1

2、 Click the red circle, and input the password, click button “ok”, shown as figure 2:

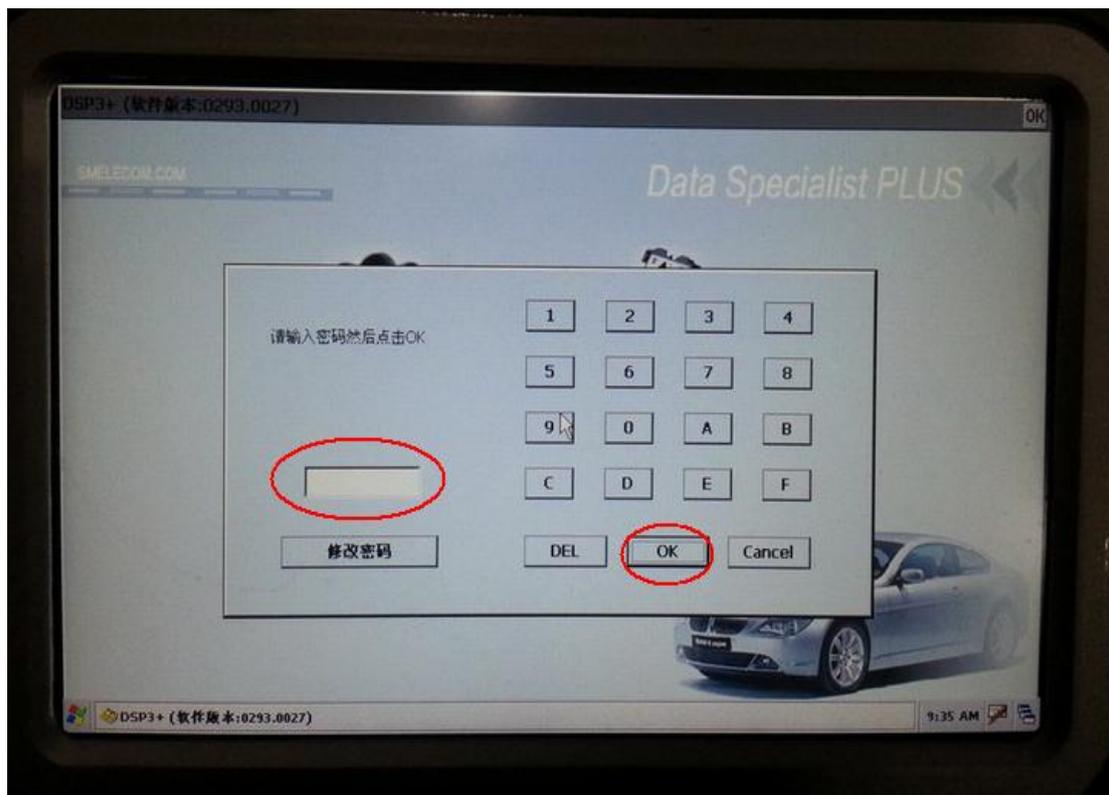


Figure 2

3、 Connect USB cable to the dsp3+, shown as figure 3:



Figure 3

4、 If your PC is windows XP operation system, set your ActiveSync software as figure 4.1:



Figure 4.1

If your PC is windows7 operation system, set your pc as figure 4.2:

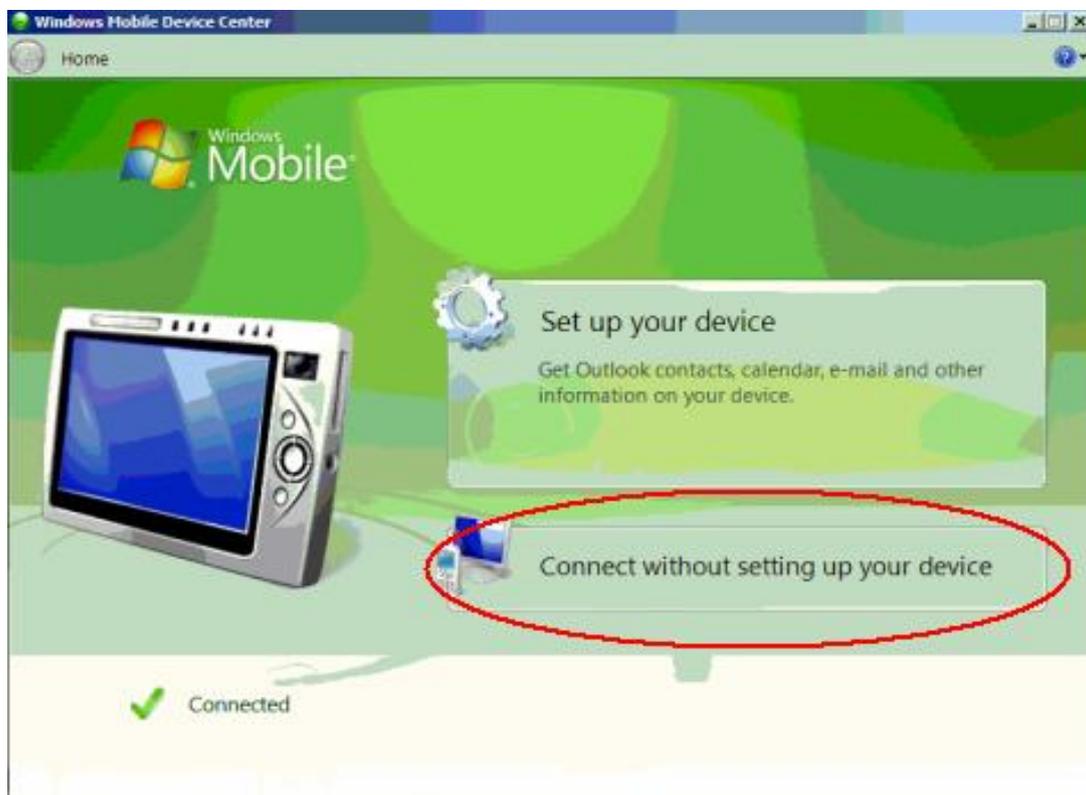


Figure 4.2

5、 XP operation system set successfully, shown as figure 5.1:

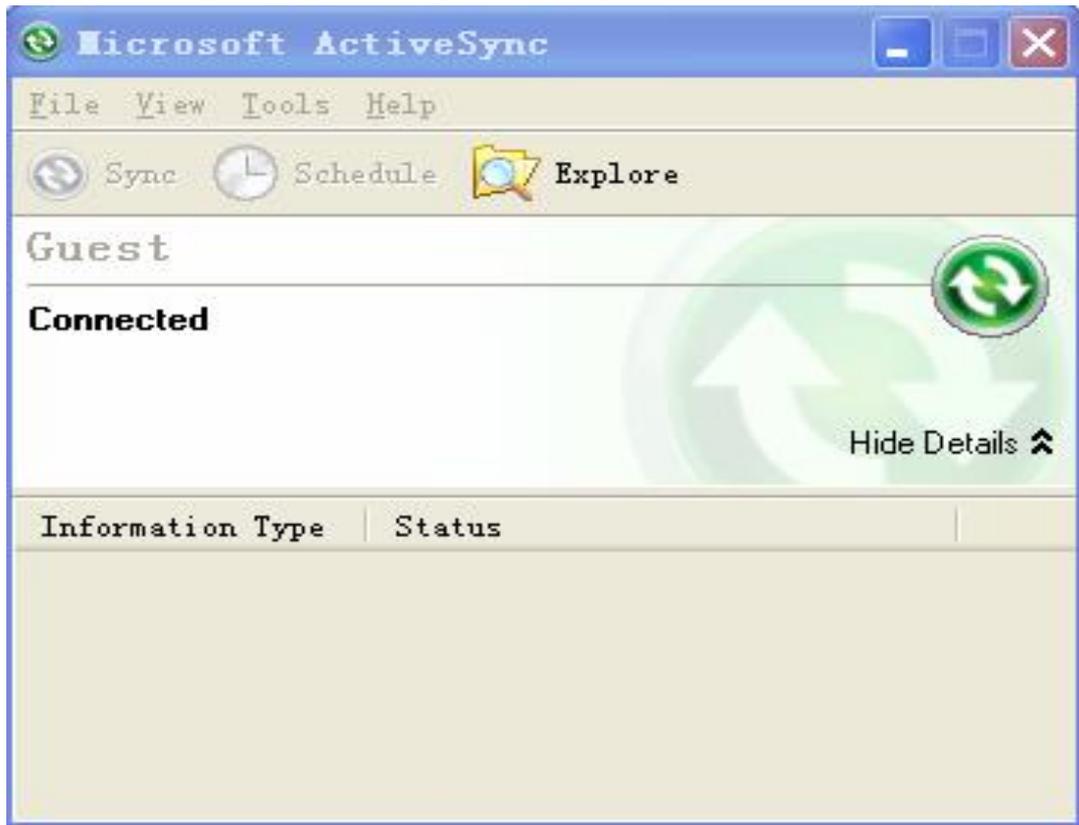


Figure 5.1

Windows7 operation system set successfully, shown as figure 5.2:



Figure 5.2

6、 Click “Update” on the screen of DSP3+, and then click “SOFTWARE UPDATE”, shown as figure 6:

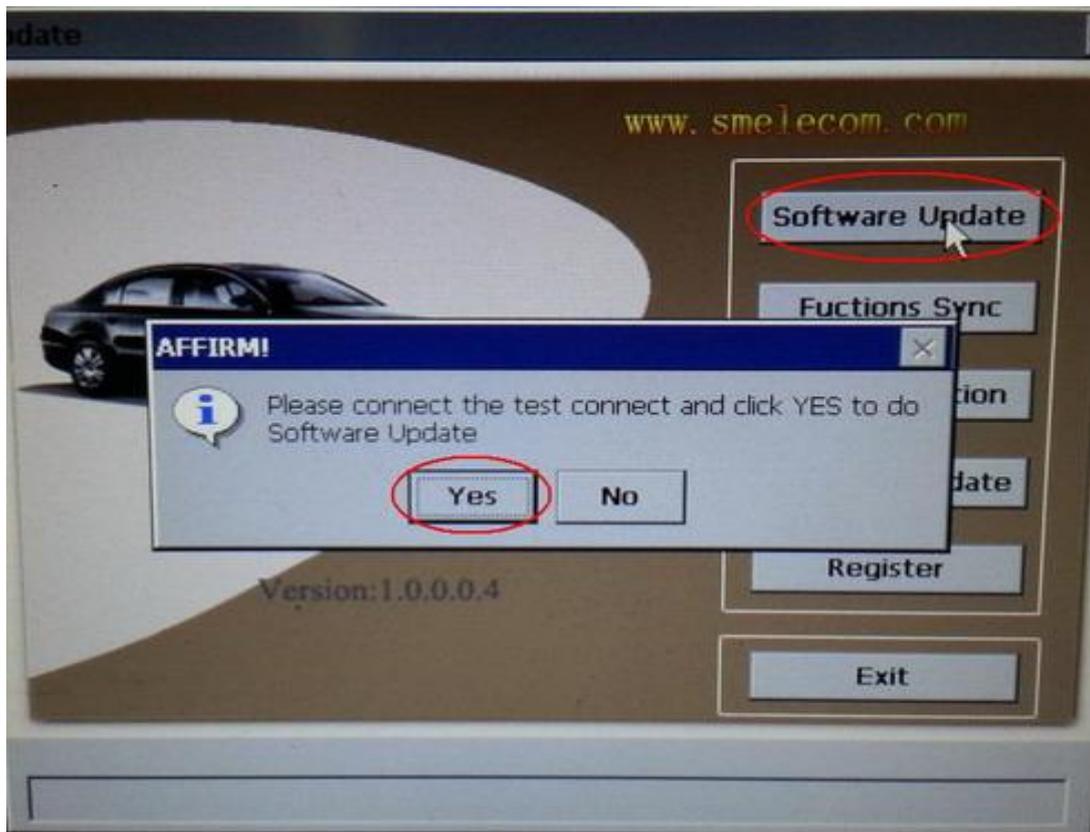


Figure 6

Click “YES” to start software update.

Note: this process will take about 30 minutes, during this time, do not disconnect the power supply , do not disconnect USB cable, do not change any settings on PC, wait patiently please.

7、 About 30 minutes later, you will see “update successfully” on the screen of DSP3+, shown as figure 7:

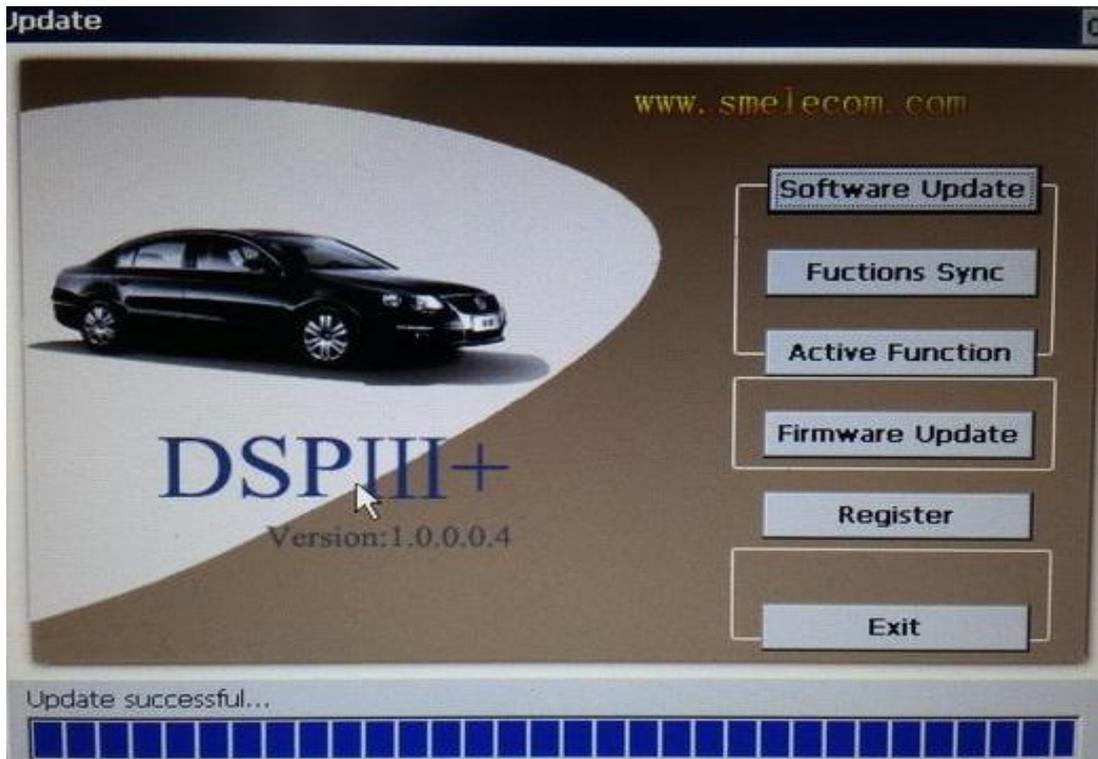


Figure 7

Software update successfully.